


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

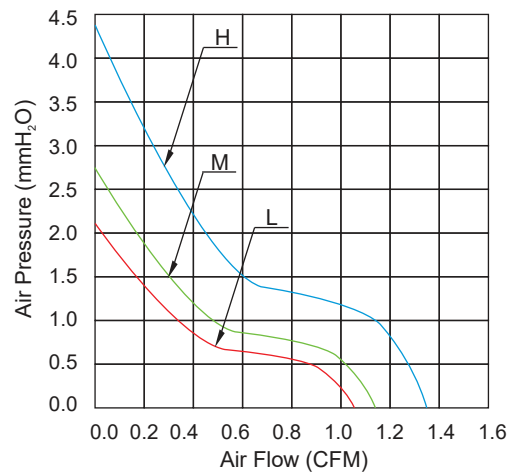

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC2010L05S CC2010L05D CC2010L05SH	Sleeve 2-Ball Hydraulic	5V	0.06	0.50	10,000 ± 10%	1.05	2.16	20.0	20 X 20 X 10
CC2010M05S CC2010M05D CC2010M05SH	Sleeve 2-Ball Hydraulic	5V	0.08	0.75	12,000 ± 10%	1.15	2.65	24.0	20 X 20 X 10
CC2010H05S CC2010H05D CC2010H05SH	Sleeve 2-Ball Hydraulic	5V	0.13	1.00	14,000 ± 10%	1.35	4.30	28.0	20 X 20 X 10
CC2010L12S CC2010L12D CC2010L12SH	Sleeve 2-Ball Hydraulic	12V	0.03	0.84	10,000 ± 10%	1.05	2.16	20.0	20 X 20 X 10
CC2010M12S CC2010M12D CC2010M12SH	Sleeve 2-Ball Hydraulic	12V	0.05	1.20	12,000 ± 10%	1.15	2.65	24.0	20 X 20 X 10
CC2010H12S CC2010H12D CC2010H12SH	Sleeve 2-Ball Hydraulic	12V	0.08	1.80	14,000 ± 10%	1.35	4.30	28.0	20 X 20 X 10

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.