


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

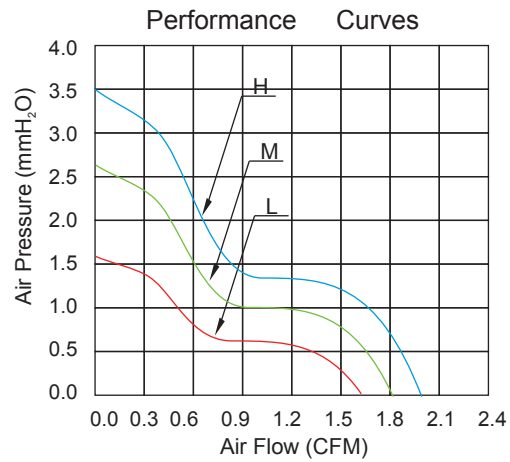

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC2507L05S	Sleeve	5V	0.12	0.60	8,000 ± 10%	1.60	1.58	15.77	25 X 25 X 07
CC2507M05S	Sleeve	5V	0.14	0.70	9,000 ± 10%	1.80	2.64	20.30	25 X 25 X 07
CC2507H05S	Sleeve	5V	0.15	0.75	10,000 ± 10%	1.92	3.55	22.70	25 X 25 X 07
CC2507L12S	Sleeve	12V	0.06	0.72	8,000 ± 10%	1.60	1.58	15.77	25 X 25 X 07
CC2507M12S	Sleeve	12V	0.07	0.84	9,000 ± 10%	1.80	2.64	20.30	25 X 25 X 07
CC2507H12S	Sleeve	12V	0.08	0.96	10,000 ± 10%	1.92	3.55	22.70	25 X 25 X 07

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.