


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

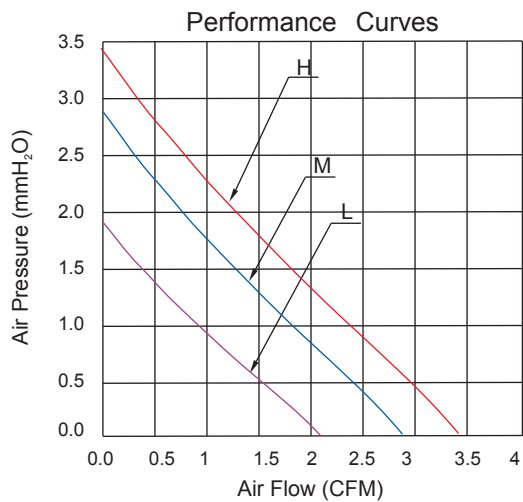

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC3006L05S	Sleeve	5V	0.11	0.85	7,500 ± 10%	2.20	1.90	25	30 X 30 X 06
CC3006M05S	Sleeve	5V	0.18	0.90	9,000 ± 10%	2.90	2.80	29	30 X 30 X 06
CC3006H05S	Sleeve	5V	0.20	1.00	10,500 ± 10%	3.40	3.40	33	30 X 30 X 06
CC3006L12S	Sleeve	12V	0.08	0.96	7,500 ± 10%	2.20	1.90	25	30 X 30 X 06
CC3006M12S	Sleeve	12V	0.10	1.20	9,000 ± 10%	2.90	2.80	29	30 X 30 X 06
CC3006H12S	Sleeve	12V	0.12	1.44	10,500 ± 10%	3.40	3.40	33	30 X 30 X 06