


### General Specification :

- Lead Wire : UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C ~ +70°C  
Humidity: 35% ~ 85%RH
- Store Temperature :  
Temperature: -40°C ~ +70°C  
Humidity: 35% ~ 85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

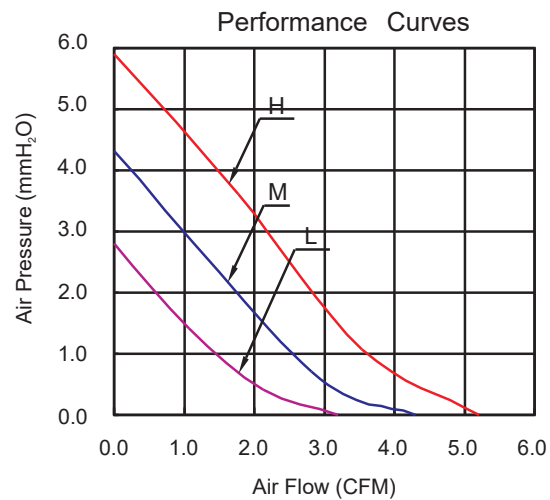

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC3010L05S CC3010L05D CC3010L05SH	Sleeve 2-Ball Hydraulic	5V	0.16	0.80	7,000 ± 10%	3.20	2.80	23	30 X 30 X 10
CC3010M05S CC3010M05D CC3010M05SH	Sleeve 2-Ball Hydraulic	5V	0.20	1.00	9,000 ± 10%	4.30	4.30	27	30 X 30 X 10
CC3010H05S CC3010H05D CC3010H05SH	Sleeve 2-Ball Hydraulic	5V	0.26	1.30	11,000 ± 10%	5.20	5.90	32	30 X 30 X 10
CC3010L12S CC3010L12D CC3010L12SH	Sleeve 2-Ball Hydraulic	12V	0.09	1.08	7,000 ± 10%	3.20	2.80	23	30 X 30 X 10
CC3010M12S CC3010M12D CC3010M12SH	Sleeve 2-Ball Hydraulic	12V	0.12	1.44	9,000 ± 10%	4.30	4.30	27	30 X 30 X 10
CC3010H12S CC3010H12D CC3010H12SH	Sleeve 2-Ball Hydraulic	12V	0.15	1.80	11,000 ± 10%	5.20	5.90	32	30 X 30 X 10
CC3010L24S CC3010L24D CC3010L24SH	Sleeve 2-Ball Hydraulic	24V	0.05	1.20	7,000 ± 10%	3.20	2.80	23	30 X 30 X 10
CC3010M24S CC3010M24D CC3010M24SH	Sleeve 2-Ball Hydraulic	24V	0.08	1.92	9,000 ± 10%	4.30	4.30	27	30 X 30 X 10
CC3010H24S CC3010H24D CC3010H24SH	Sleeve 2-Ball Hydraulic	24V	0.11	2.64	11,000 ± 10%	5.20	5.90	32	30 X 30 X 10

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.