


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

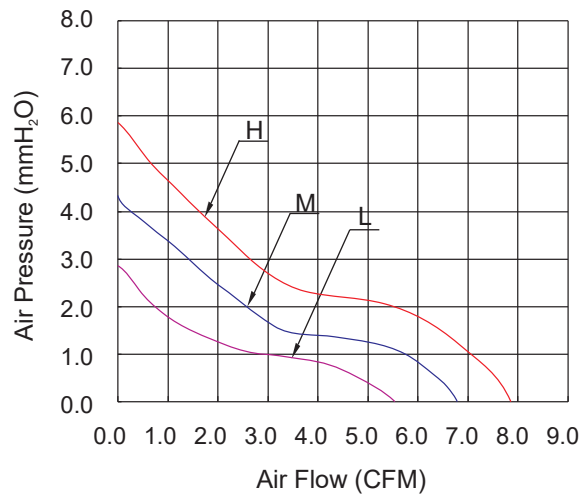

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC4020L05S CC4020L05D CC4020L05SH	Sleeve 2-Ball Hydraulic	5V	0.12	0.60	5,000 ± 10%	5.0	2.7	24.0	40 X 40 X 20
CC4020M05S CC4020M05D CC4020M05SH	Sleeve 2-Ball Hydraulic	5V	0.15	0.75	6,000 ± 10%	6.2	4.0	27.0	40 X 40 X 20
CC4020H05S CC4020H05D CC4020H05SH	Sleeve 2-Ball Hydraulic	5V	0.18	0.90	7,000 ± 10%	7.4	5.6	30.0	40 X 40 X 20
CC4020L12S CC4020L12D CC4020L12SH	Sleeve 2-Ball Hydraulic	12V	0.06	0.72	5,000 ± 10%	5.0	2.7	24.0	40 X 40 X 20
CC4020M12S CC4020M12D CC4020M12SH	Sleeve 2-Ball Hydraulic	12V	0.07	0.84	6,000 ± 10%	6.2	4.0	27.0	40 X 40 X 20
CC4020H12S CC4020H12D CC4020H12SH	Sleeve 2-Ball Hydraulic	12V	0.09	1.08	7,000 ± 10%	7.4	5.6	30.0	40 X 40 X 20
CC4020L24S CC4020L24D CC4020L24SH	Sleeve 2-Ball Hydraulic	24V	0.03	1.44	5,000 ± 10%	5.0	2.7	24.0	40 X 40 X 20
CC4020M24S CC4020M24D CC4020M24SH	Sleeve 2-Ball Hydraulic	24V	0.03	1.68	6,000 ± 10%	6.2	4.0	27.0	40 X 40 X 20
CC4020H24S CC4020H24D CC4020H24SH	Sleeve 2-Ball Hydraulic	24V	0.04	1.92	7,000 ± 10%	7.4	5.6	30.0	40 X 40 X 20