


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

### Performance Curves

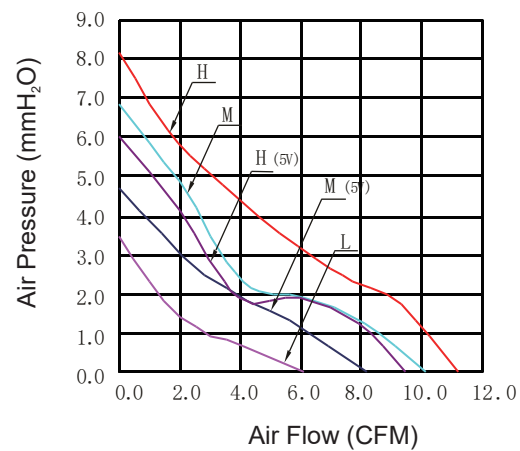

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC4028L05S CC4028L05D	Sleeve 2-Ball	5V	0.22	1.10	5,000 ± 10%	6.10	3.50	23	40 X 40 X 28
CC4028M05S CC4028M05D	Sleeve 2-Ball	5V	0.30	1.50	6,500 ± 10%	8.20	4.70	28	40 X 40 X 28
CC4028H05S CC4028H05D	Sleeve 2-Ball	5V	0.35	1.75	7,500 ± 10%	9.40	6.00	32	40 X 40 X 28
CC4028L12S CC4028L12D	Sleeve 2-Ball	12V	0.12	1.44	5,000 ± 10%	6.10	3.50	23	40 X 40 X 28
CC4028M12S CC4028M12D	Sleeve 2-Ball	12V	0.18	2.16	8,000 ± 10%	10.10	6.80	33	40 X 40 X 28
CC4028H12S CC4028H12D	Sleeve 2-Ball	12V	0.20	2.40	8,800 ± 10%	11.20	8.10	36	40 X 40 X 28
CC4028L24S CC4028L24D	Sleeve 2-Ball	24V	0.09	2.16	5,000 ± 10%	6.10	3.50	23	40 X 40 X 28
CC4028M24S CC4028M24D	Sleeve 2-Ball	24V	0.12	2.88	8,000 ± 10%	10.10	6.80	33	40 X 40 X 28
CC4028H24S CC4028H24D	Sleeve 2-Ball	24V	0.16	3.84	8,800 ± 10%	11.20	8.10	36	40 X 40 X 28

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.