


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C ~ +70°C
Humidity: 35% ~ 85%RH
- Store Temperature :
Temperature: -40°C ~ +70°C
Humidity: 35% ~ 85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

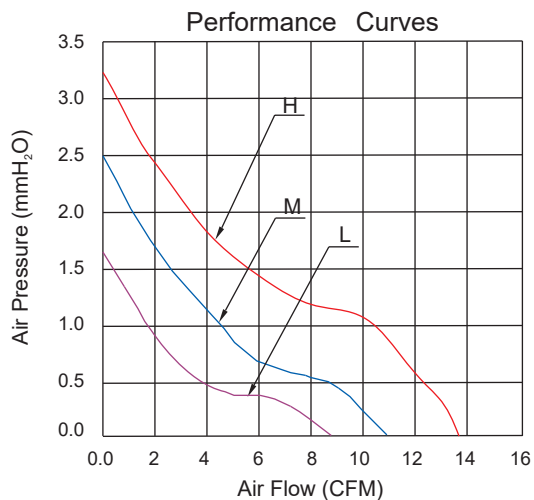

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC5010L05S CC5010L05D CC5010L05SH	Sleeve 2-Ball Hydraulic	5V	0.06	0.70	3,500 ± 10%	8.60	1.60	22	50 X 50 X 10
CC5010M05S CC5010M05D CC5010M05SH	Sleeve 2-Ball Hydraulic	5V	0.09	0.90	4,500 ± 10%	11.00	2.50	28	50 X 50 X 10
CC5010H05S CC5010H05D CC5010H05SH	Sleeve 2-Ball Hydraulic	5V	0.15	1.10	5,500 ± 10%	13.80	3.30	32	50 X 50 X 10
CC5010L12S CC5010L12D CC5010L12SH	Sleeve 2-Ball Hydraulic	12V	0.03	0.72	3,500 ± 10%	8.60	1.60	22	50 X 50 X 10
CC5010M12S CC5010M12D CC5010M12SH	Sleeve 2-Ball Hydraulic	12V	0.04	0.84	4,500 ± 10%	11.00	2.50	28	50 X 50 X 10
CC5010H12S CC5010H12D CC5010H12SH	Sleeve 2-Ball Hydraulic	12V	0.06	0.96	5,500 ± 10%	13.80	3.30	32	50 X 50 X 10
CC5010L24S CC5010L24D CC5010L24SH	Sleeve 2-Ball Hydraulic	24V	0.05	1.20	3,500 ± 10%	8.60	1.60	22	50 X 50 X 10
CC5010M24S CC5010M24D CC5010M24SH	Sleeve 2-Ball Hydraulic	24V	0.06	1.44	4,500 ± 10%	11.00	2.50	28	50 X 50 X 10
CC5010H24S CC5010H24D CC5010H24SH	Sleeve 2-Ball Hydraulic	24V	0.07	1.68	5,500 ± 10%	13.80	3.30	32	50 X 50 X 10