


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C ~ +70°C  
Humidity: 35% ~ 85%RH
- Store Temperature :  
Temperature: -40°C ~ +70°C  
Humidity: 35% ~ 85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

### Performance Curves

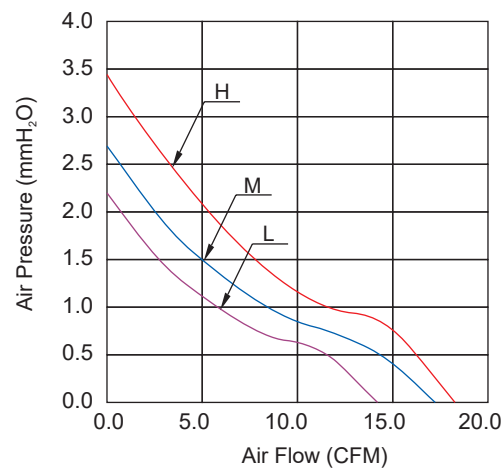

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC6015L05S CC6015L05SH CC6015L05D	Sleeve Hydraulic 2-Ball	5V	0.25	1.25	3,000 ± 10%	12.4	1.9	25	60 X 60 X 15
CC6015M05S CC6015M05SH CC6015M05D	Sleeve Hydraulic 2-Ball	5V	0.30	1.50	3,500 ± 10%	14.4	2.2	29	60 X 60 X 15
CC6015H05S CC6015H05SH CC6015H05D	Sleeve Hydraulic 2-Ball	5V	0.35	1.75	4,000 ± 10%	16.5	2.5	33	60 X 60 X 15
CC6015L12S CC6015L12SH CC6015L12D	Sleeve Hydraulic 2-Ball	12V	0.09	1.08	3,000 ± 10%	12.4	1.9	25	60 X 60 X 15
CC6015M12S CC6015M12SH CC6015M12D	Sleeve Hydraulic 2-Ball	12V	0.10	1.20	3,500 ± 10%	14.4	2.2	29	60 X 60 X 15
CC6015H12S CC6015H12SH CC6015H12D	Sleeve Hydraulic 2-Ball	12V	0.12	1.44	4,000 ± 10%	16.5	2.5	33	60 X 60 X 15
CC6015L24S CC6015L24SH CC6015L24D	Sleeve Hydraulic 2-Ball	24V	0.07	1.68	3,000 ± 10%	12.4	1.9	25	60 X 60 X 15
CC6015M24S CC6015M24SH CC6015M24D	Sleeve Hydraulic 2-Ball	24V	0.08	1.92	3,500 ± 10%	14.4	2.2	29	60 X 60 X 15
CC6015H24S CC6015H24SH CC6015H24D	Sleeve Hydraulic 2-Ball	24V	0.10	2.40	4,000 ± 10%	16.5	2.5	33	60 X 60 X 15

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.