


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

### Performance Curves

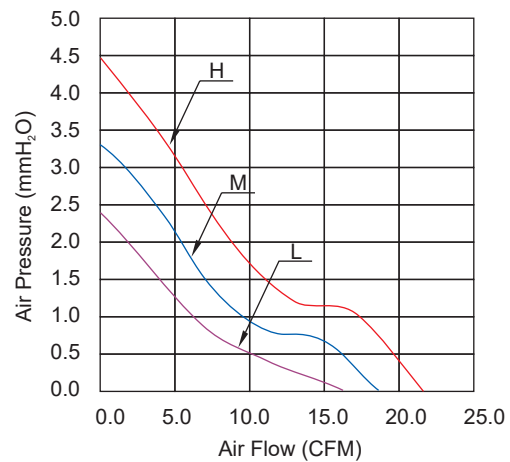

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC6020L12S	Sleeve	12V	0.08	0.96	3,000 ± 10%	15.70	2.40	26	60 X 60 X 20
CC6020M12S	Sleeve	12V	0.12	1.44	3,500 ± 10%	18.50	3.30	29	60 X 60 X 20
CC6020H12S	Sleeve	12V	0.16	1.92	4,000 ± 10%	21.20	4.50	33	60 X 60 X 20
CC6020L24S	Sleeve	24V	0.08	1.92	3,000 ± 10%	15.70	2.40	26	60 X 60 X 20
CC6020M24S	Sleeve	24V	0.10	2.40	3,500 ± 10%	18.50	3.30	29	60 X 60 X 20
CC6020H24S	Sleeve	24V	0.13	3.12	4,000 ± 10%	21.20	4.50	33	60 X 60 X 20

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.