



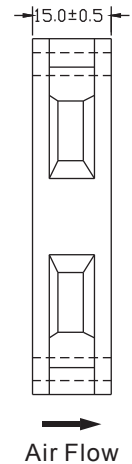

Rotation ↻

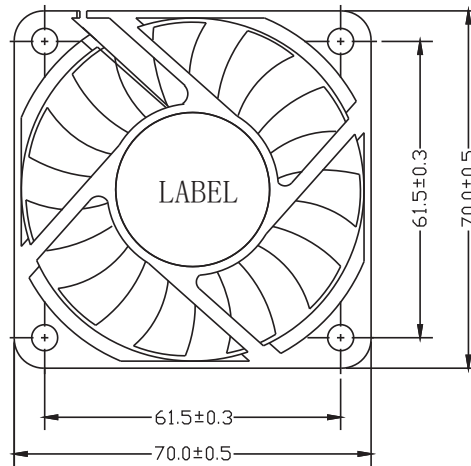

Unit: mm


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

### Performance Curves

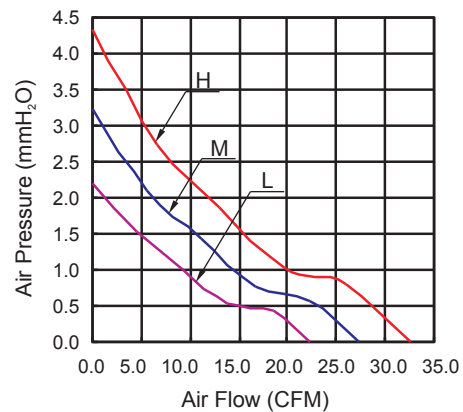

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC7015L05S CC7015L05D CC7015L05SH	Sleeve 2-Ball Hydraulic	5V	0.18	0.9	2,500 ± 10%	19.2	1.7	26	70 X 70 X 15
CC7015M05S CC7015M05D CC7015M05SH	Sleeve 2-Ball Hydraulic	5V	0.24	1.2	3,000 ± 10%	23.6	2.4	30	70 X 70 X 15
CC7015H05S CC7015H05D CC7015H05SH	Sleeve 2-Ball Hydraulic	5V	0.32	1.60	3,500 ± 10%	27.2	3.2	37	70 X 70 X 15
CC7015L12S CC7015L12D CC7015L12SH	Sleeve 2-Ball Hydraulic	12V	0.18	1.56	2,500 ± 10%	19.2	1.7	26	70 X 70 X 15
CC7015M12S CC7015M12D CC7015M12SH	Sleeve 2-Ball Hydraulic	12V	0.15	1.8	3,000 ± 10%	23.6	2.4	30	70 X 70 X 15
CC7015H12S CC7015H12D CC7015H12SH	Sleeve 2-Ball Hydraulic	12V	0.18	2.16	3,500 ± 10%	27.2	3.2	37	70 X 70 X 15
CC7015L24S CC7015L24D CC7015L24SH	Sleeve 2-Ball Hydraulic	24V	0.07	1.68	2,500 ± 10%	19.2	1.7	26	70 X 70 X 15
CC7015M24S CC7015M24D CC7015M24SH	Sleeve 2-Ball Hydraulic	24V	0.1	2.4	3,000 ± 10%	23.6	2.4	30	70 X 70 X 15
CC7015H24S CC7015H24D CC7015H24SH	Sleeve 2-Ball Hydraulic	24V	0.15	3.6	3,500 ± 10%	27.2	3.2	37	70 X 70 X 15

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.