


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

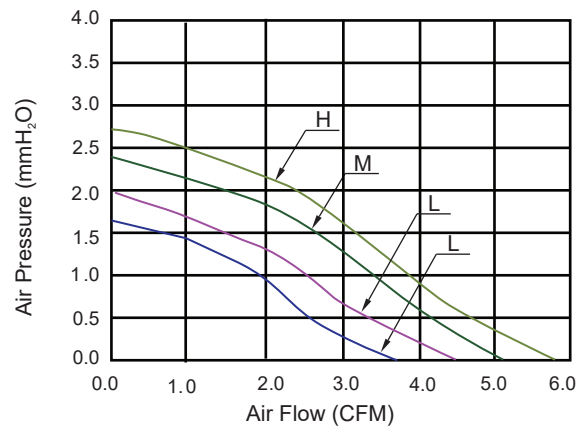

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
BF4010L05S BF4010L05D	Sleeve 2-Ball	5V	0.14	0.35	5,000 ± 10%	3.7	1.7	23	40 X 40 X 10
BF4010M05S BF4010M05D	Sleeve 2-Ball	5V	0.22	0.85	6,000 ± 10%	4.4	2.0	27	40 X 40 X 10
BF4010H05S BF4010H05D	Sleeve 2-Ball	5V	0.29	1.00	7,000 ± 10%	5.1	2.4	31	40 X 40 X 10
BF4010L12S BF4010L12D	Sleeve 2-Ball	12V	0.06	0.60	6,000 ± 10%	4.4	2.0	27	40 X 40 X 10
BF4010M12S BF4010M12D	Sleeve 2-Ball	12V	0.08	0.72	7,000 ± 10%	5.1	2.4	31	40 X 40 X 10
BF4010H12S BF4010H12D	Sleeve 2-Ball	12V	0.10	1.92	8,000 ± 10%	5.8	2.7	35	40 X 40 X 10
BF4010L24S BF4010L24D	Sleeve 2-Ball	24V	0.03	1.92	6,000 ± 10%	4.4	2.0	27	40 X 40 X 10
BF4010M24S BF4010M24D	Sleeve 2-Ball	24V	0.04	2.88	7,000 ± 10%	5.1	2.4	31	40 X 40 X 10
BF4010H24S BF4010H24D	Sleeve 2-Ball	24V	0.05	3.36	8,000 ± 10%	5.8	2.7	35	40 X 40 X 10

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.