


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C ~ +70°C
Humidity: 35% ~ 85%RH
- Store Temperature :
Temperature: -40°C ~ +70°C
Humidity: 35% ~ 85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

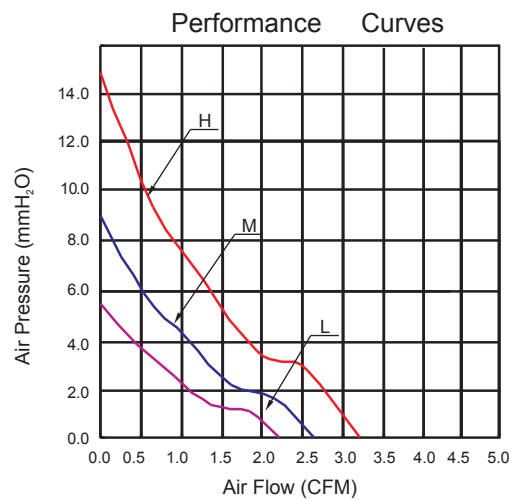

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
BF4020L05S BF4020L05D	Sleeve 2-Ball	5V	0.10	0.50	5,500 ± 10%	2.25	5.80	30	40 X 40 X 20
BF4020M05S BF4020M05D	Sleeve 2-Ball	5V	0.12	0.60	6,500 ± 10%	2.64	8.90	34	40 X 40 X 20
BF4020H05S BF4020H05D	Sleeve 2-Ball	5V	0.15	0.75	8,000 ± 10%	3.30	14.60	40	40 X 40 X 20
BF4020L12S BF4020L12D	Sleeve 2-Ball	12V	0.09	1.08	5,500 ± 10%	2.25	5.80	30	40 X 40 X 20
BF4020M12S BF4020M12D	Sleeve 2-Ball	12V	0.10	1.20	6,500 ± 10%	2.64	8.90	34	40 X 40 X 20
BF4020H12S BF4020H12D	Sleeve 2-Ball	12V	0.13	1.56	8,000 ± 10%	3.30	14.60	40	40 X 40 X 20
BF4020L24S BF4020L24D	Sleeve 2-Ball	24V	0.05	1.20	5,500 ± 10%	2.25	5.80	30	40 X 40 X 20
BF4020M24S BF4020M24D	Sleeve 2-Ball	24V	0.06	1.44	6,500 ± 10%	2.64	8.90	34	40 X 40 X 20
BF4020H24S BF4020H24D	Sleeve 2-Ball	24V	0.08	1.92	8,000 ± 10%	3.30	14.60	40	40 X 40 X 20

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.