



DC Blower Fan 60x60x25mm

■ 尺寸图 (DIMENSION DRAWING)

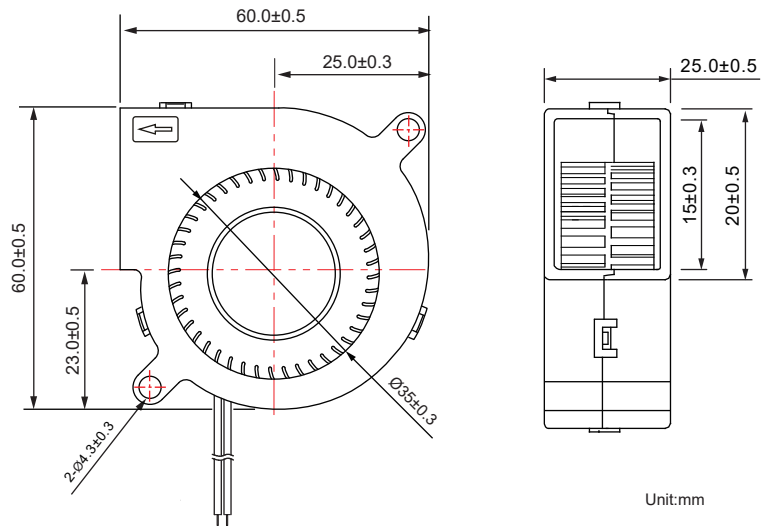

- * 轴承类型: 含油轴承, 双滚珠轴承, 液压轴承 (Bearing type: Sleeve, 2-Ball, Hydraulic)
- * 材料(Material):
框叶(Frame & Impeller): PBT
- * 引线(Lead wire):
UL2468 AWG #26 or equivalent
红色线正级 Red Wire Positive (+)
黑色线负级 Black Wire Negative (-)
- * 可选择增加风扇功能(Functions are optional)
- * 重量(Weight): 54g

■ 风压&风量曲线图 P and Q CURVE

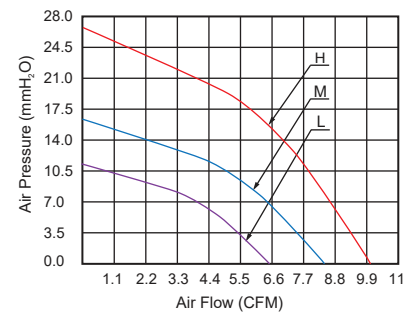

型号 Model	轴承类型 Bearing Type	电压 Rated Voltage	电压范围 Operation Voltage	电流 Current	功率 Input Power	转速 Speed	风量 Air Flow	风压 Static Pressure	噪音 Noise Level
		VDC	VDC	Amp	Watt	RPM	CFM	MM-H ₂ O	dBA
BF6025L12S	Sleeve	12V	10.8~13.2	0.12	1.44	3,500±10%	6.50	10.9	31.0
BF6025L12D	2-Ball								
BF6025L12SH	Hydraulic								
BF6025M12S	Sleeve	12V	10.8~13.2	0.18	2.16	4,500±10%	8.10	16.0	41.0
BF6025M12D	2-Ball								
BF6025M12SH	Hydraulic								
BF6025H12S	Sleeve	12V	10.8~13.2	0.40	4.80	5,500±10%	10.0	26.3	49.3
BF6025H12D	2-Ball								
BF6025H12SH	Hydraulic								
BF6025L24S	Sleeve	24V	21.6~26.4	0.11	2.64	3,500±10%	6.50	10.9	31.0
BF6025L24D	2-Ball								
BF6025L24SH	Hydraulic								
BF6025M24S	Sleeve	24V	21.6~26.4	0.15	3.60	4,500±10%	8.10	16.0	41.0
BF6025M24D	2-Ball								
BF6025M24SH	Hydraulic								
BF6025H24S	Sleeve	24V	21.6~26.4	0.26	6.24	5,500±10%	10.0	26.3	49.3
BF6025H24D	2-Ball								
BF6025H24SH	Hydraulic								

- * 以上为额定电压下的常规参数(All readings are typical values at rated voltage)
- * 规格如有变动不另行通知(Specifications are subjected to change without prior notice)