


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black (FG)Yellow
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

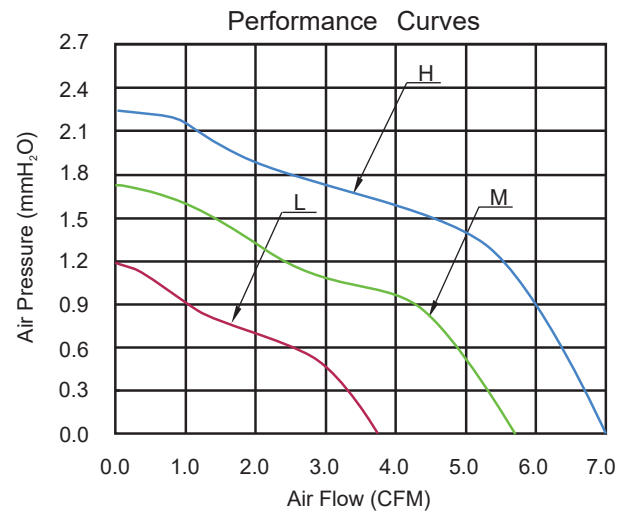

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC4010L05S I (Frameless) CC4010L05D I (Frameless) CC4010L05SH I (Frameless)	Sleeve 2-Ball Hydraulic	5V	0.09	0.45	4,000 ± 10%	3.8	1.2	21	Φ36 x 10
CC4010M05S I (Frameless) CC4010M05D I (Frameless) CC4010M05SH I (Frameless)	Sleeve 2-Ball Hydraulic	5V	0.12	0.60	5,000 ± 10%	5.8	1.7	24	Φ36 x 10
CC4010H05S I (Frameless) CC4010H05D I (Frameless) CC4010H05SH I (Frameless)	Sleeve 2-Ball Hydraulic	5V	0.15	0.75	6,000 ± 10%	7.0	2.2	28	Φ36x 10
CC4010L12S I (Frameless) CC4010L12D I (Frameless) CC4010L12SH I (Frameless)	Sleeve 2-Ball Hydraulic	12V	0.06	0.72	4,000 ± 10%	3.8	1.2	21	Φ36 x 10
CC4010M12S I (Frameless) CC4010M12D I (Frameless) CC010M12SH I (Frameless)	Sleeve 2-Ball Hydraulic	12V	0.07	0.84	5,000 ± 10%	5.8	1.7	24	Φ36 x 10
CC4010H12S I (Frameless) CC4010H12D I (Frameless) CC4010H12SH I (Frameless)	Sleeve 2-Ball Hydraulic	12V	0.08	0.96	6,000 ± 10%	7.0	2.2	28	Φ36 x 10

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.