


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black (FG)Yellow
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

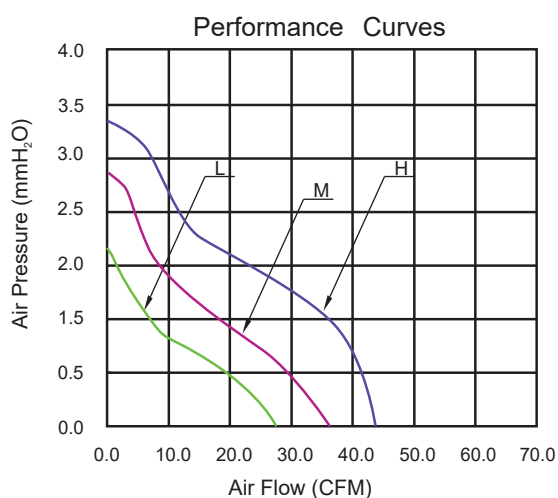

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC8025L12S (Frameless)	Sleeve	12V	0.12	1.44	2,000 ± 10%	28.5	2.2	22.0	Φ74 x 103 x 23
CC8025L12D (Frameless)	2-Ball								
CC8025M12S (Frameless)	Sleeve	12V	0.15	1.80	2,500 ± 10%	35.6	2.75	27.6	Φ74 x 103 x 23
CC8025M12D (Frameless)	2-Ball								
CC8025H12S (Frameless)	Sleeve	12V	0.20	2.40	3,000 ± 10%	42.7	3.3	33.0	Φ74 x 103 x 23
CC8025L12D (Frameless)	2-Ball								
CC8025L18S (Frameless)	Sleeve	18V	0.10	1.80	2,000 ± 10%	28.5	2.2	22.0	Φ74 x 103 x 23
CC8025L18D (Frameless)	2-Ball								
CC8025M18S (Frameless)	Sleeve	18V	0.13	2.34	2,500 ± 10%	35.6	2.75	27.6	Φ74 x 103 x 23
CC8025M18D (Frameless)	2-Ball								
CC8025H18S (Frameless)	Sleeve	18V	0.17	3.06	3,000 ± 10%	42.7	3.3	33.0	Φ74 x 103 x 23
CC8025H18D (Frameless)	2-Ball								
CC8025L24S (Frameless)	Sleeve	24V	0.10	2.40	2,000 ± 10%	28.5	2.2	22.0	Φ74 x 103 x 23
CC8025L24D (Frameless)	2-Ball								
CC8025M24S (Frameless)	Sleeve	24V	0.13	3.12	2,500 ± 10%	35.6	2.75	27.6	Φ74 x 103 x 23
CC8025M24D (Frameless)	2-Ball								
CC8025H24S (Frameless)	Sleeve	24V	0.15	3.60	3,000 ± 10%	42.7	3.3	33.0	Φ74 x 103 x 23
CC8025H24D (Frameless)	2-Ball								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.