


Performance Curves

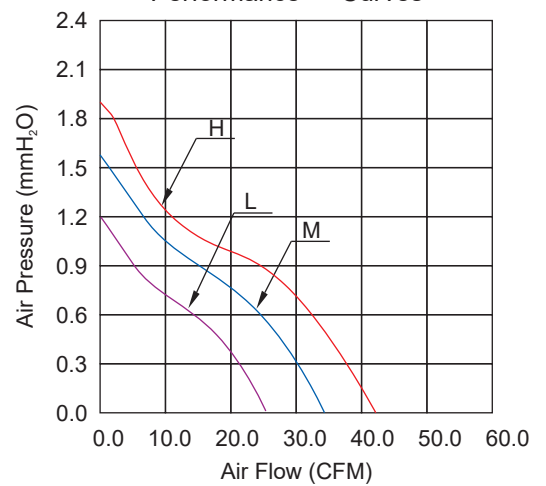

General Specification:

- Lead Wire: UL Type (+)Red (-)Black

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC9225L12S/UV CC9225L12B/UV CC9225L12D/UV	Sleeve 1-Ball 2-Ball	12V	0.14	1.68	1,500 ± 10%	24.4	1.2	21	92 X 92 X 25
CC9225M12S/UV CC9225M12B/UV CC9225M12D/UV	Sleeve 1-Ball 2-Ball	12V	0.17	2.04	2,000 ± 10%	32.5	1.6	28	92 X 92 X 25
CC9225H12S/UV CC9225H12B/UV CC9225H12D/UV	Sleeve 1-Ball 2-Ball	12V	0.25	3.00	2,500 ± 10%	40.6	2.0	35	92 X 92 X 25
CC9225L24S/UV CC9225L24B/UV CC9225L24D/UV	Sleeve 1-Ball 2-Ball	24V	0.12	2.88	1,500 ± 10%	24.4	1.2	21	92 X 92 X 25
CC9225M24S/UV CC9225M24B/UV CC9225M24D/UV	Sleeve 1-Ball 2-Ball	24V	0.13	3.12	2,000 ± 10%	32.5	1.6	28	92 X 92 X 25
CC9225H24S/UV CC9225H24B/UV CC9225H24D/UV	Sleeve 1-Ball 2-Ball	24V	0.17	4.08	2,500 ± 10%	40.6	2.0	36	92 X 92 X 25

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.